




PRODUCT SPECIFICATION

METRIC THREADED NUT TRM

TYPE	COMPOSITION	R	A	B	UNITS / BOX
AISCAN-TRM-16	STEEL	M16X1,5	20	3,5	150
AISCAN-TRM-20	“	M20X1,5	24	3,5	150
AISCAN-TRM-25	“	M25X1,5	30	4	100
AISCAN-TRM-32	“	M32X1,5	38	5	50
AISCAN-TRM-40	“	M40X1,5	50	5	50
AISCAN-TRM-50	“	M50X1,5	60	6	25
AISCAN-TRM-63	“	M63X1,5	70	7,5	25
EDITION DATE	EDITION NUMBER	CARD NUMBER			
2009/02	2	EP-TRM			

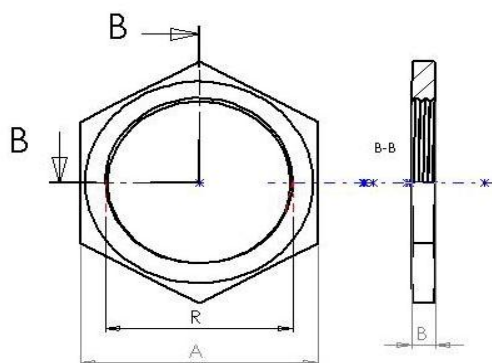

SPECIFICATIONS ACCORDING TO STANDARD UNE-EN 61386-21

- CODE: 555711542010
- OPERATING TEMPERATURE RANGE: -45 + 400°C
- CRUSHING STRENGTH: > 4000N
- IMPACT RESISTANCE: >20J AT -45°C
- CORROSION RESISTANCE: MEDIUM
- FLAME PROPAGATE: NO
- MATERIAL: COLD ROLLED STEEL WITH LOW CONTENT CARBON. QUALITY TYPE DC03, IN ACCORDING TO STANDARD EN-10130. ELECTRO-GALVANIZED FINISH.

- NO CONTROLLED COPY. THIS INFORMATION COULD BE MODIFIED BY AISCAN WITHOUT PREVIOUS ADVERTISMENT.-