

REF. 30521 (M 600)

ESPECIFICACIONES INSTALACIÓN INSTALLATION FEATURES

Instalación <i>Installation</i>	_____	Sobreponer <i>Surface Mounting</i>
Alto <i>High</i>	_____	55 mm
Ancho <i>Width</i>	_____	250 mm
Profundo <i>Deep</i>	_____	43,50 mm

LED _____ Si
Led _____ *Yes*


Monitorización _____ Si
Monitoring contact _____ *Yes*

Temporización _____ 0"- 3"- 6"- 9"
Timing

- ✔ Contacto magnetico integrado para el control del estado de la puerta.
Built-In magnetic contact for door status monitoring.

PLANO TÉCNICO TECHNICAL DRAW

VENTOSAS
MAGNETIC LOCK

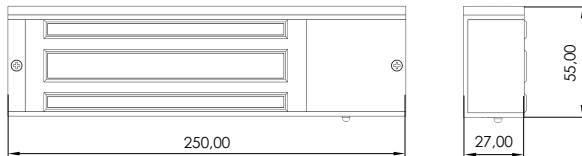


CONTRA PLACA
ARMATURE PLATE




ACCESORIOS DE INSTALACIÓN INSTALLATION ACCESSORIES

PERFIL 'L'
'L' PROFILE



x1 PIEZA
x1 PIECE

PERFIL 'ZL'
'ZL' PROFILE

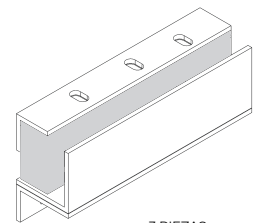


x3 PIEZAS
x3 PIECES

ESPECIFICACIONES ELÉCTRICAS ELECTRICAL FEATURES

MODELO MODEL	M 300	M 600	M 800	M 1200
RETENCIÓN HOLDING FORCE	180 Kg	280 Kg	350 Kg	500 Kg
ALIMENTACIÓN POWER SUPPLY	12 VDC	12-24 VDC	12-24 VDC	12-24 VDC
CONSUMO CORRIENTE CURRENT CONSUMPTION	360 mA	500-250 mA	500-250 mA	500-250 mA

CABLEADO
WIRING

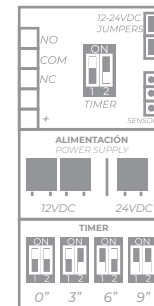

FUNCIÓN TIMER ES OPCIONAL
TIMER IS OPTIONAL FUNCTION